

LISTA DE APLICACIONES - BUYERS GUIDE

182008




8 424073 104670

Qty: 944

Weight: 855

O.E.M.	MAKE
34 21 2 444 446	MINI
34 21 9 804 735	MINI
34 21 9 804 739	MINI
34 21 9 808 172	MINI
34 21 9 808 706	MINI

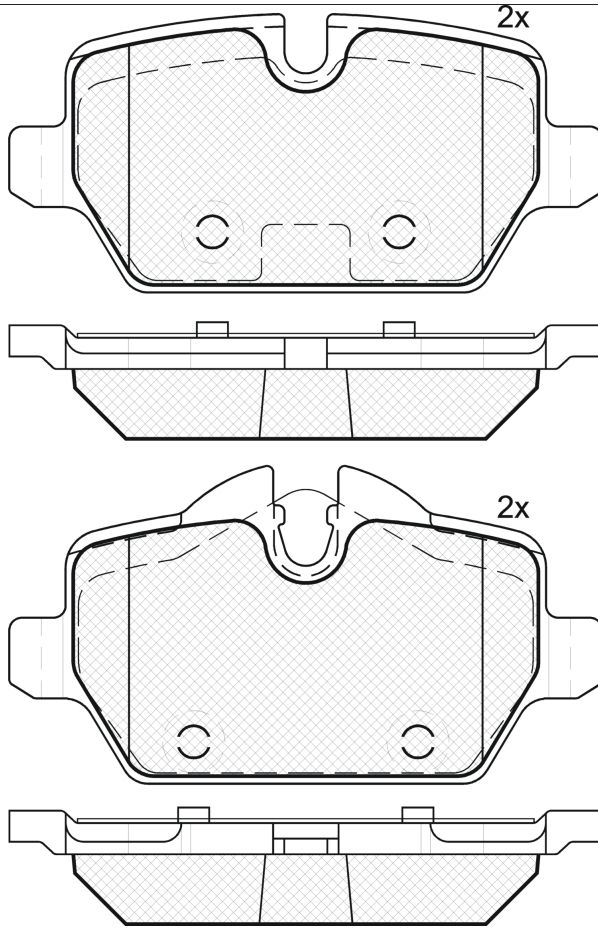

182008

E 9 90R-01110/2970



Trw

95.3x44.7x16.9

95.3x51.1x16.9

WVA	FMSI
25478	D1554-8764
25479	
MAKE	
MINI	



Trac.	CC	Kw	CV
-------	----	----	----



Front / Rear

MINI

MINI COUNTRYMAN (R60) 08.10-10.16

Estate (Supermini car-B Segment)

One (N16 B16 A)		Gasolina	FWD	1598	72	98	08.10-10.16	■
Cooper (N16 B16 A)	USA	Gasolina	FWD	1598	85	115	08.10-10.16	■
Cooper (N16 B16 A)	discØ 280	Gasolina	FWD	1598	88	120	08.10-10.16	■
Cooper (N16 B16 A)	USA	Gasolina	FWD	1598	90	122	08.10-10.16	■
Cooper ALL4 (N18 B16 A)		Gasolina	4WD	1598	90	122	11.12-10.16	■
Cooper ALL4 (N16 B16 A)		Gasolina	4WD	1598	90	122	11.12-10.16	■
Cooper S (N18 B16 A)		Gasolina	FWD	1598	120	163	08.10-10.16	■
Cooper S ALL4 (N18 B16 A)	USA	Gasolina	4WD	1598	120	163	08.10-10.16	■
Cooper S (N18 B16 A)	USA	Gasolina	FWD	1598	135	184	08.10-10.16	■
Cooper S ALL4 (N18 B16 A)	USA	Gasolina	4WD	1598	135	184	08.10-10.16	■
Cooper S (N18 B16 A)		Gasolina	FWD	1598	140	190	07.14-10.16	■
Cooper S ALL4 (N18 B16 A)		Gasolina	4WD	1598	140	190	07.14-10.16	■
Cooper S (N18 B16 A)		Gasolina	FWD	1598	147	200	08.10-10.16	■
John Cooper Works ALL4 (N18 B16 C)		Gasolina	4WD	1598	160	218	11.12-10.16	■
One D (N47 C16 A)		Diesel	FWD	1598	66	90	08.10-10.16	■
Cooper D (N47 C16 A)		Diesel	FWD	1598	82	112	08.10-10.16	■
Cooper D ALL4 (N47 C16 A)		Diesel	4WD	1598	82	112	08.10-10.16	■
Cooper D (N47 C20 A)		Diesel	FWD	1995	82	112	03.11-10.16	■
Cooper D ALL4 (N47 C20 A)		Diesel	4WD	1995	82	112	03.11-10.16	■
Cooper SD (N47 C20 A)		Diesel	FWD	1995	100	136	03.11-10.16	■
Cooper SD ALL4 (N47 C20 A)		Diesel	4WD	1995	100	136	03.11-10.16	■
Cooper SD (N47 C20 A)		Diesel	FWD	1995	105	143	03.11-10.16	■
Cooper SD ALL4 (N47 C20 A)		Diesel	4WD	1995	105	143	03.11-10.16	■

LISTA DE APLICACIONES - BUYERS GUIDE

MINI PACEMAN (R61) 03.12-10.16					Coupe (Supermini car-B Segment)			
Cooper ALL4 (N16 B16 A)		Gasolina	4WD	1598	85	116	07.13-09.16	■
Cooper (N16 B16 A)	discØ 280	Gasolina	FWD	1598	88	120	04.12-09.16	■
Cooper (N16 B16 A)		Gasolina	FWD	1598	90	122	04.12-09.16	■
Cooper ALL4 (N16 B16 A)	discØ 280	Gasolina	4WD	1598	90	122	07.13-09.16	■
Cooper ALL4 (N18 B16 A)	discØ 280	Gasolina	4WD	1598	90	122	11.12-09.16	■
Cooper S (N18 B16 A)	discØ 280	Gasolina	FWD	1598	120	163	01.14-09.16	■
Cooper S ALL4 (N18 B16 A)	discØ 280	Gasolina	4WD	1598	120	163	03.12-09.16	■
Cooper S (N18 B16 A)		Gasolina	FWD	1598	135	184	11.12-10.16	■
Cooper S ALL4 (N18 B16 A)		Gasolina	4WD	1598	135	184	03.12-09.16	■
Cooper S (N18 B16 A)	discØ 280	Gasolina	FWD	1598	140	190	07.14-09.16	■
Cooper S ALL4 (N18 B16 A)	discØ 280	Gasolina	4WD	1598	140	190	03.12-09.16	■
John Cooper Works ALL4 (N18 B16 C)		Gasolina	4WD	1598	160	218	03.13-10.16	■
Cooper D (N47 C16 A)		Diesel	FWD	1598	82	112	04.12-09.16	■
Cooper D ALL4 (N47 C16 A)		Diesel	4WD	1598	82	112	04.12-09.16	■
Cooper D (N47 C20 A)		Diesel	FWD	1995	82	112	07.12-09.16	■
Cooper D ALL4 (N47 C20 A)		Diesel	4WD	1995	82	112	03.12-09.16	■
Cooper SD ALL4 (N47 C20 A)	discØ 280	Diesel	4WD	1995	100	136	04.12-09.16	■
Cooper SD (N47 C20 A)		Diesel	FWD	1995	105	143	03.12-09.16	■
Cooper SD ALL4 (N47 C20 A)		Diesel	4WD	1995	105	143	04.12-09.16	■