


LISTA DE APLICACIONES - BUYERS GUIDE

21 9657 00



8 424073 073990

Qty: 850 Weight: 10.300

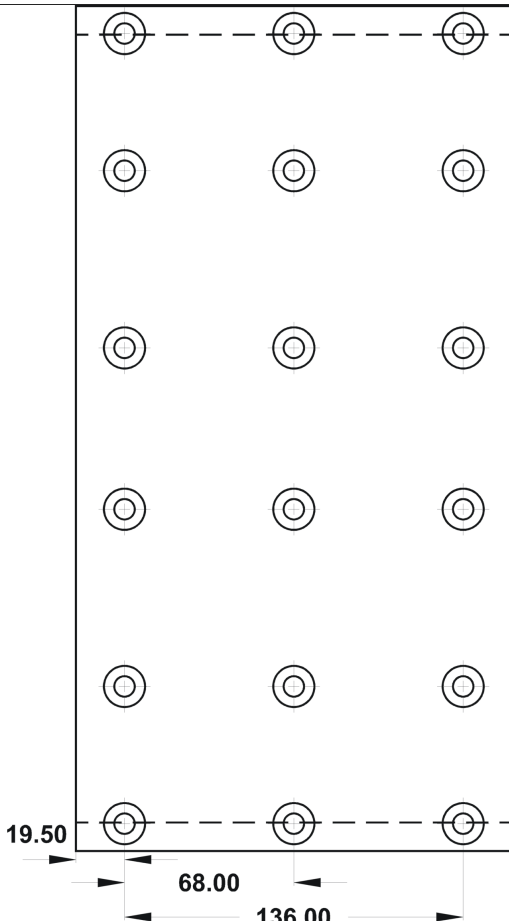

21 9657 00



175x13.5x370- Ø414

WVA
19657

MAKE
RABA
RENAULT TRUCKS



Trac.	CC	Kw	CV		Front / Rear
					

RABA									
Eje/Axle							Trailer Axle		
160x420	01/73-						01.53-		■
RENAULT TRUCKS									
C Series 10.82-10.98							Concrete Mixer		
C 260.26 (MIDS 06.20.45 B)	-12/88	Diesel		9839	192	261	10.82-05.91		■
C 290.26,C 300.26 (MIDR 06.20.45 D)	-12/88	Diesel		9839	214	291	05.86-10.98		■
C 290.26,C 300.26 (MIDR 06.20.45 D3)	-12/88	Diesel		9839	214	291	05.86-10.98		■
C Series 10.82-10.98							Dump Truck		
C 260.19 (MIDS 06.20.45 B)	-12/88	Diesel		9839	192	261	10.82-05.91		■
C 290.19,C 300.19 (MIDR 06.20.45 D)	-12/88	Diesel		9839	214	291	10.82-10.98		■
C 290.19,C 300.19 (MIDR 06.20.45 D3)	-12/88	Diesel		9839	214	291	10.82-10.98		■
C Series 10.82-10.98							Platform/Chassis		
C 210.19 (MIDS 06.20.30 N)	-12/88	Diesel		8820	153	208	12.83-05.91		■
C 210.19 (MIDS 06.20.30 N)	-12/88	Diesel		8820	153	208	12.83-05.91		■
C 260.19 (MIDS 06.20.45 B)	-12/88	Diesel		9839	192	261	10.82-05.91		■
C 260.19,C 280.19 (MIDS 06.20.45 B)	-12/88	Diesel		9839	192	261	10.82-10.98		■
C 260.26 (MIDS 06.20.45 B)	-12/88	Diesel		9839	192	261	10.82-05.91		■
C 290.26,C 300.26 (MIDR 06.20.45 D)	-12/87	Diesel		9839	214	291	10.82-10.98		■
C 290.26,C 300.26 (MIDR 06.20.45 D3)	-12/87	Diesel		9839	214	291	10.82-10.98		■
C Series 10.82-10.98							Truck Tractor		
C 290.19/T (MIDR 06.20.45 D)	-12/88	Diesel		9839	214	291	05.86-05.91		■
C 290.19/T (MIDR 06.20.45 D)	-12/88	Diesel		9839	214	291	05.86-05.91		■

LISTA DE APLICACIONES - BUYERS GUIDE

G Series 10.82-03.93						Dump Truck			
G 230.17 (MIDS 06.20.30 P)	-12/86	Diesel		8821	169	230	01.85-05.90		■
G 260.17 (MIDS 06.20.45)	-12/86	Diesel		9839	192	261	10.82-05.90		■
G 260.19 (MIDS 06.20.45)	-12/86	Diesel		9839	192	261	10.82-05.90		■
G Series 10.82-03.93						Municipal Vehicle			
G 210.17 BOM (MIDS 06.20.30 N)	-12/86	Diesel		8820	153	208	11.83-02.90		■
G 210.17 BOM (MIDS 06.20.30 N1)	-12/86	Diesel		8820	153	208	11.83-02.90		■
G 210.17 BOM (MIDS 06.20.30 N)	-12/86	Diesel		8820	153	208	11.83-02.90		■
G 210.17 BOM (MIDS 06.20.30 N1)	-12/86	Diesel		8820	153	208	11.83-02.90		■
G 210.18 BOM (MIDS 06.20.30 N)	-12/86	Diesel		8820	153	208	11.83-02.90		■
G 210.18 BOM (MIDS 06.20.30 N1)	-12/86	Diesel		8820	153	208	11.83-02.90		■
G 210.19 BOM (MIDS 06.20.30 N)	-12/86	Diesel		8820	153	208	11.83-02.90		■
G 210.19 BOM (MIDS 06.20.30 N1)	-12/86	Diesel		8820	153	208	11.83-02.90		■
G Series 10.82-03.93						Platform/Chassis			
G 170.11 (MIDR 06.02.12 D)	-12/86	Diesel		5490	127	173	05.83-02.90		■
G 170.13 (MIDR 06.02.12 D)	-12/86	Diesel		5490	127	173	05.83-02.90		■
G 170.15 (MIDR 06.02.12 D)	-12/86	Diesel		5490	127	173	05.83-02.90		■
G 170.16 (MIDR 06.02.12 D)	-12/86	Diesel		5490	127	173	05.83-02.90		■
G 170.17 (MIDR 06.02.12 D)	-12/86	Diesel		5490	127	173	05.83-02.90		■
G 170.17 (MIDR 06.02.12 D)	-12/86	Diesel		5490	127	173	05.83-02.90		■
G 210.16 (MIDS 06.20.30 N)	-12/86	Diesel		8820	153	208	11.83-02.90		■
G 210.16 (MIDS 06.20.30 N1)	-12/86	Diesel		8820	153	208	11.83-02.90		■
G 210.19 (MIDS 06.20.30 N)	-12/86	Diesel		8820	153	208	11.83-02.90		■
G 210.19 (MIDS 06.20.30 N1)	-12/86	Diesel		8820	153	208	11.83-02.90		■
G 230.17 (MIDS 06.20.30 P)	-12/86	Diesel		8821	169	230	01.85-05.90		■
G 230.17 (MIDS 06.20.30 P)	-12/86	Diesel		8821	169	230	01.85-05.90		■
G 230.19 (MIDS 06.20.30 P)	-12/86	Diesel		8821	169	230	01.85-05.90		■
G 230.19 (MIDS 06.20.30 P)	-12/86	Diesel		8821	169	230	01.85-05.90		■
G 260.16 (MIDS 06.20.45)	-12/86	Diesel		9839	192	261	10.82-05.90		■
G 260.16 (MIDS 06.20.45)	-12/86	Diesel		9839	192	261	10.82-05.90		■
G 260.17 (MIDS 06.20.45)	-12/86	Diesel		9839	192	261	10.82-05.90		■
G 260.17 (MIDS 06.20.45)	-12/86	Diesel		9839	192	261	10.82-05.90		■
G 260.19 (MIDS 06.20.45)	-12/86	Diesel		9839	192	261	10.82-05.90		■
G 260.19 (MIDS 06.20.45 B)	-12/86	Diesel		9839	192	261	10.82-05.90		■
G 260.24 CIT (MIDS 06.20.45)	-12/86	Diesel		9839	192	261	10.82-05.90		■
G Series 10.82-03.93						Truck Tractor			
G 230.17/T (MIDS 06.20.30 P)	-12/86	Diesel		8821	169	230	01.85-05.90		■
G 260.15/T (MIDS 06.20.45)	-12/86	Diesel		9839	192	261	10.82-05.90		■
G 260.17/T (MIDS 06.20.45)	-12/86	Diesel		9839	192	261	10.82-05.90		■
G 260.19/T (MIDS 06.20.45)	-12/86	Diesel		9839	192	261	10.82-05.90		■
G 260.22/T (MIDS 06.20.45)	-12/86	Diesel		9839	192	261	10.82-05.90		■